



IMT products are:

- **Maintenance free**
- **Safety**
- **Environmental friendly**

LED Aquarius Floodlight

Main Characteristics

Approx 100.000 hours Maintenance Free
Luminaire is " Sealed for Life"
Shock and vibration resistant
According to ICAO Annex 14 and CAA CAP437

Specification/Technical Data


Housing	: Stainless Steel 316L (AISI)
Lens	: Polycarbonate
Light source	: LEDs
Light output	: 35.000 Candela
Ingress Protection	: IP66
Voltage Range	: 95-250 volt AC 50/60Hz or 24-30 volt DC
Power	: 18 Watt
Burning Position	: Horizontal
(Re)ignition	: Instant
Ambient Temperature	: -40°C to +40°C
Termination	: 2x M25x1,5

Options

Explosion proof Version : Zone 1 (category 2)
under certification
Lower Mounting Structure
(Height 150mm according to IMO Modu Code 2001)



Dimensions

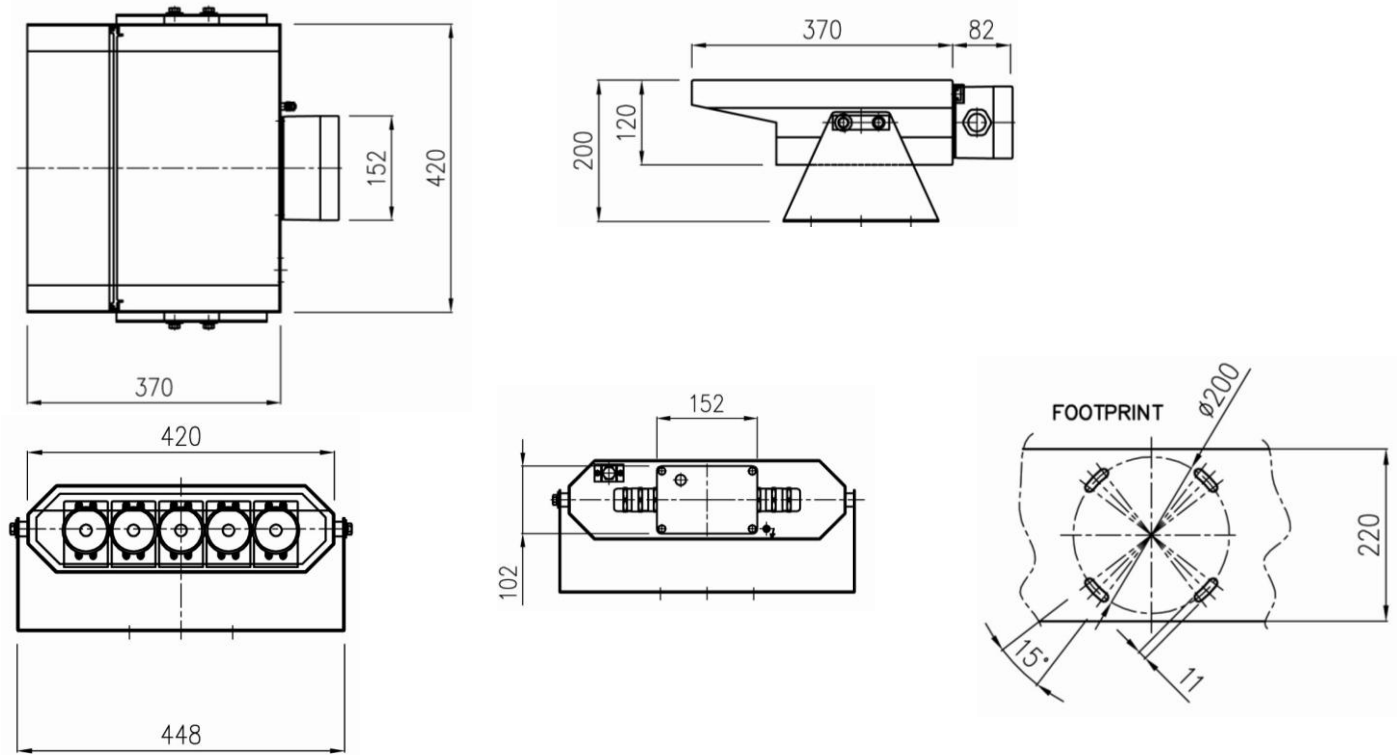

Ordering Details

Article code	Wattage	Nominal Voltage	Connection	Weight
ELFZ5AZ3Z441	18W	Multi Voltage	Junctionbox with 2 M20 Entries	9Kg
ELFZ1AZ3Z441	18W	24V	Junctionbox with 2 M20 Entries	9Kg