

IMT products are:

- Maintenance free
- Safety
- Environmental friendly

ILED® Factotum Perimeter Light

Main Characteristics

Up to 100.000 hours Maintenance Free
Shock and vibration resistant
According to ICAO Annex 14, CAA CAP437, and IMO Modu code 2001

Specification/Technical Data


Housing:	Coated Stainless Steel 316L
Lens:	Tempered Glass
Ingress Protection:	IP67
Voltage Range:	95-255 Vac 50/60Hz
Power:	15W
Burning Position:	Universal
(Re)ignition:	Instant
Ambient Temperature:	-30°C to +55°C
Cable Gland Entries:	2xØ20,5 entries suitable for M20
Terminals :	0,08 - 2,5 mm ² , Suitable for through wiring

Options

Mounting Brackets:	On request
ILED® color:	Red and White



Dimensions

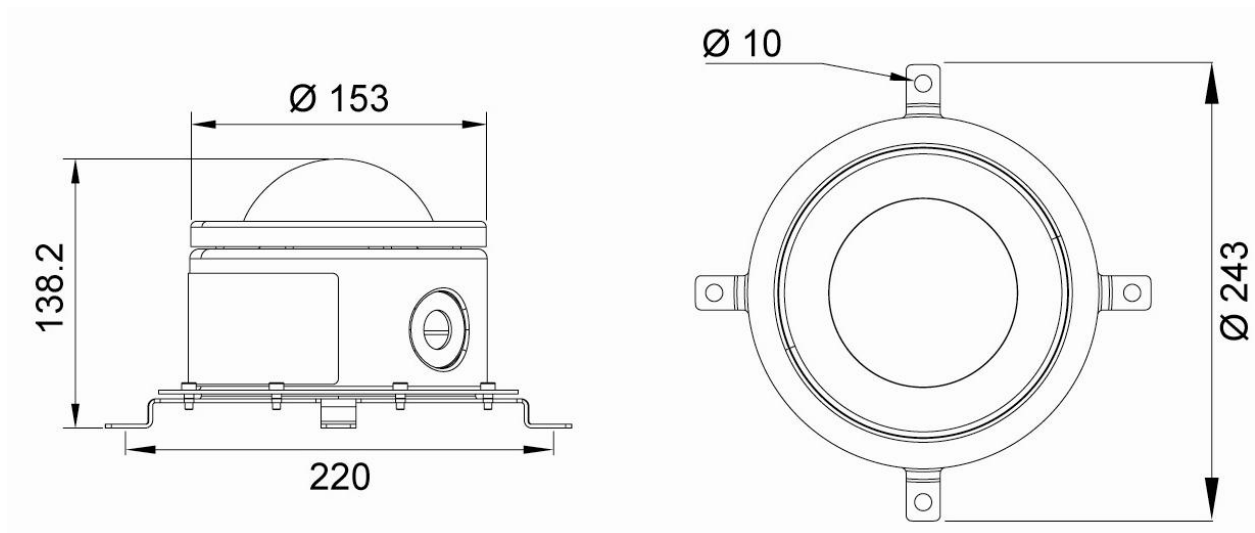

Ordering Details

Article code	Wattage	Nominal voltage	Connection	Weight
ELPB5GP0A453	15W	95-255 Vac 50/60Hz	2x $\varnothing 20,2$ entries suitable for M20	2,5 Kg