

**IMT products are:**

- Maintenance free
- Safety
- Environmental friendly

# HID

## Varialumen Downlights

### Main Characteristics

Industrial, suitable for extremely high area's  
 Die cast aluminium lampholder  
 Hinged optical system allows relamping  
 Safety chain  
 Facet aluminium anodized reflector  
 Glass in spun into reflector for maximum seal reliability  
 Beam spread can be varied by using the adjustable lampholder

### Specification/Technical Data 400 HID

Lens:	Tempered glass
Body:	Rugged light weight die-cast aluminium
ballast	housing
Ingress Protection:	IP66
Input voltage:	230V AC
Power:	400 Watt
Light source:	HID
Lumen:	42000 Lumen
Dimensions:	H 54 cm, diameter 58 cm
Max. ambient temp.:	70°C

### Options

Instant hot restart luminaire  
 Narrow beam / wide beam

### Specification/Technical Data 1000 HID


Lens:	Tempered glass
Body:	Double Rugged light weight die-cast
aluminium	ballast housing
Ingress Protection:	IP66
Input voltage:	380V AC
Power:	1000 Watt
Light source:	HID
Lumen:	110.000 Lumen
Dimensions:	H 66 cm, diameter 58 cm
Max. ambient temp.:	70°C

### Options

Narrow beam / wide beam



*HID Varialumen 400W*

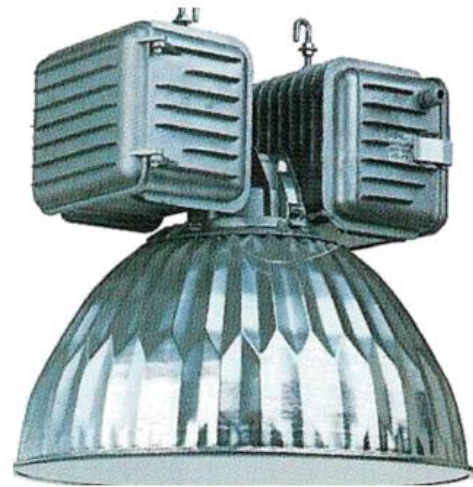

*HID Varialumen 1000W*

## Ordering Details

Article code	Version	Wattage	Voltage
EIMTVARIA1000	IP66	1000W	380V
EIMTVARIA400	IP66	400W	230V