

IMT products are:

- Maintenance free
- Safety
- Environmental friendly

TL

9 Series Multi Purposelight

Main Characteristics

Explosion proof indoor and outdoor luminaire with high frequency generator.

Single point locking mechanism

Integral isolation switch

Optionally equipped with emergency back-up

Specification/Technical Data


Lens:	High impact polycarbonate diffuser and body
Body:	Anodised corrosion resistant aluminium
Ingress Protection:	IP65
Input voltage:	230V 50/60Hz
Lamp options:	2x18W, 2x36W, 2x58W
Light source:	TL
Temperature range:	-20°C to +55°C
Cable gland:	2 x M20 at each end (3 plugged)
Battery time emergency mode:	3 hour

Certification Details



ATEX Classification:	Group II, Category 2, Gas
Area Classification:	Category 2 (Zone1)
Certificate:	SIRA 00 ATEX 3071
Marking:	EEx ed II 2G 3D IIC T5 (at 25°C), T4 (at 55°C)

Options

Emergency back-up
Alternative voltages

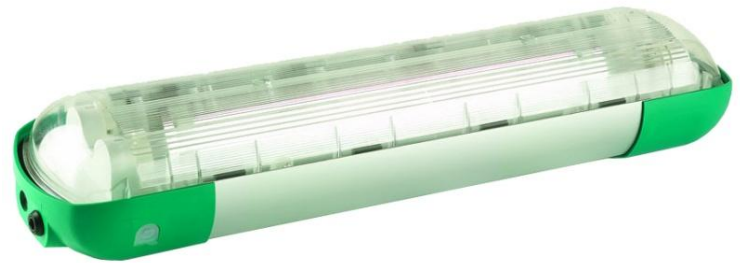

Dimensions

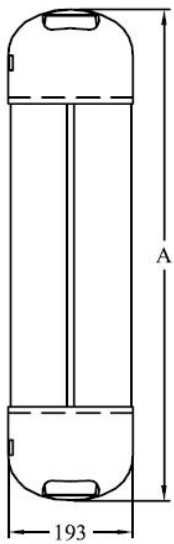

Ordering Details

Article code	Wattage	Voltage	Connection	Dimensions (l x w)	Weight
ETSC4AM0Z239A	2x18W	230V	2 x M20 at each end (3 plugged)	760x193mm	6,8Kg
ETSE4AM0Z239A	2x36W	230V	2 x M20 at each end (3 plugged)	1365x193mm	10.4Kg