



### The IMT products are:

- Maintenance free
- Safety
- Environmental friendly

## TL EXEN Multi Purpose Light

### Main Characteristics

Explosion proof indoor and outdoor luminaire with high frequency generator.  
Unrestricted breathing  
No vacuum test required  
Optionally equipped with emergency back-up

### Specification/Technical Data

Lens	: Polycarbonate diffuser, attached to the body using stainless steel retaining clips
Body	: GRP moulded body
Ingress Protection	: IP65
Input voltage	: 230V 50/60Hz
Lamp options	: 2x18W, 2x36W, 2x58W
Light source	: TL
Temperature range	: -40°C to +55°C
Cable entries	: 1 x M20 at each end
Battery time	
Emergency mode	: 3 hour

### Certification Details


ATEX Classification	: Group II, Category 3, Gas and Dust
Area Classification	: Category 3 (Zone 2)
Certificate	: Epsilon 02 ATEX 1167
Marking	: EEx nC II 3GD T4 -40°C to +55°C

### Options

Emergency back-up  
Other lamp options available  
Mounting brackets (instead of standard fixing points)  
Alternative voltages



## Dimensions

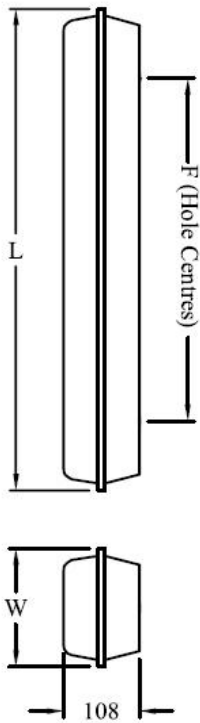

## Ordering Details

Article code	Wattage	Voltage	Connection	Dimensions (a x b x c)	Weight
ETSCF4AM0Z339P	2x18W	230V	1xM20 at each end	1150x240x261	2,8 Kg
ETSEF4AM0Z339P	2x36W	230V	1xM20 at each end	1740x240x242	3,8 Kg
ETSGF4AM0Z339P	2x58W	230V	1xM20 at each end	2089x240x291	4,6 Kg