

**IMT products are:**

- Maintenance free
- Safety
- Environmental friendly

# TL

## Saluka Multi Purpose Light

### Main Characteristics

Explosion proof indoor and outdoor luminaire with high frequency generator.

Optionally equipped with emergency battery.

### Specification/Technical Data

Lens	: Hardened safety glass 5mm thick
Body	: Stainless Steel 304
Ingress Protection	: IP66
Input voltage	: 220...240V 50/60 Hz
Lamp options	: 1x18W...to 2x58W
Light source	: TL
Temperature range	: -20°C to +40°C
Cable gland	: M20
Battery Back-up	: 1 hour

### Options

Industrial version IP66

EX Version

Other lamp options available

White painted metal sheet body

Mounting brackets


PC lens

### Certification Details EX version

ATEX Classification	: Group II, Category 3, gas and dust
Area Classification	: Category 3 (Zone 2 and 22)
Certificate	: FTZU 08 ATEX 0133
Marking	: EX II3GD Ex nA tD A II T4 T67°C



## Dimensions

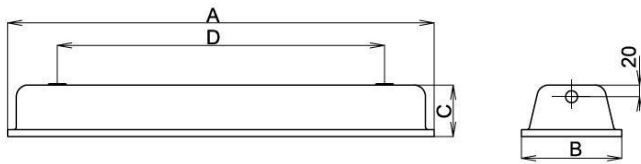

## Ordering Details

Article code	Version	Wattage	Voltage	Connection	Dimensions (a x b x c x d)	Weight
ETSC4AL0Z342R	EX	2x18W	230V	M20 Cable Gland	705x192x90x560mm	3Kg
ETSC4AL0Z442R	IP66	2x18W	230V	M20 Cable Gland	705x192x90x560mm	3Kg
ETSE4AL0Z342R	EX	2x36W	230V	M20 Cable Gland	1305x192x90x1160mm	4,5Kg
ETSE4AL0Z442R	IP66	2x58W	230V	M20 Cable Gland	1305x192x90x1160mm	4,5Kg