

IMT products are:

- Maintenance free
- Safety
- Environmental friendly

TL

Vipet Downlight

Main Characteristics

Explosion proof indoor and outdoor luminaire with high frequency generator.

The cover is attached to the body using stainless steel clips. Optionally equipped with emergency battery.

Specification/Technical Data

Lens:	Polycarbonate
Body:	Polycarbonate
Ingress Protection:	IP66
Input voltage:	230V 50Hz
Lamp options:	2x18W...to 2x58W
Light source:	TL
Temperature range:	-20°C to +40°C
Cable gland:	M20
Battery time	
Emergency mode:	1 hour

Certification Details


ATEX Classification:	Group II, Category 3, gas and dust
Area Classification:	Category 3 (Zone 2 and 22)
Certificaat:	FTZU 06 ATEX 0200X
Marking:	EX II3GD Ex nA tD A II T5 T42°C

Options

Emergency back-up
Other lamp options available
Mounting brackets



Dimensions

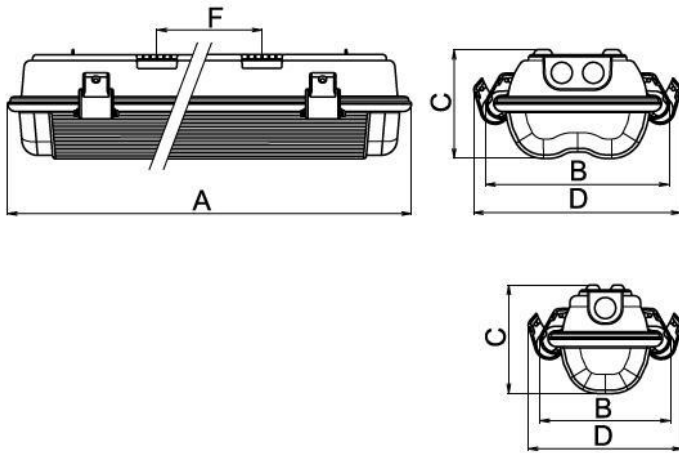

Ordering Details

Article code	Version	Wattage	Voltage	Connection	Weight
ETSB4AM0Z342P	EX	1x18W	230V	M20 Cable Gland	1,5Kg
ETSD4AM0Z342P	EX	1x36W	230V	M20 Cable Gland	1,5Kg
ETSC4AM0Z342P	EX	2x18W	230V	M20 Cable Gland	3,8Kg
ETSE4AM0Z342P	EX	2x36W	230V	M20 Cable Gland	3,8Kg